DUROPAL PYROEX SPI ASHBACKS



Amorini

With Duropal you're covered in all directions...

On the leading edge of kitchen fashion, Amorini supplies a range of high quality worktop products from modern European designers and manufacturers.


Duropal Pyroex Splashbacks are a compact high pressure laminate that is flame retardant and compliant to Australian and New Zealand standards. Suitable for installation behind a Gas Hob when installed in accordance with the Duropal Pyroex Splashback Fitting Guide.

Duropal Pyroex Splashbacks are a 4mm compact material, laminated in several layers, with a decorative surface on both sides. This flexible splashback doesn't require tooling and is easy to install. Compact is hard and resistant to wear, impact and scratching, making it long lasting and easy to clean.

QUICK FACTS

- Easy to Install
- Heat Resistant
- Impact Resistant
- Fire Retardant
- Moisture Resistant
- High Colour Fastness

TO VIEW OUR COLOUR COLLECTION, PLEASE GO TO: https://amorini.co.nz/products/duropal-pyroex-splashbacks/

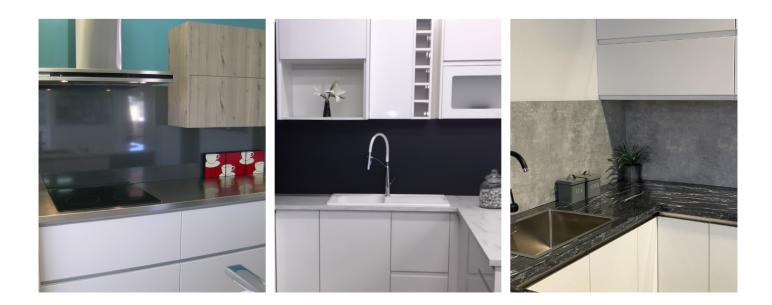



DUROPAL PYROEX SPLASHBACKS

With Duropal you're covered in all directions...

This is an abbreviated guide, for further information please refer to the Pyroex Splashback Fitting Guide (which is supplied with every splashback): https://amorini.co.nz/wp-content/uploads/2019/01/Duropal-Pyroex-Splashback-Fitting-Guide.pdf

Machining

Duropal Pyroex Splashbacks are easily machined with tungsten tipped tools. Sheets can be cut using tungsten tipped circular saws or equally using a straight edge and router. Holes can be drilled and/or cut using a jigsaw.

Installation

When installed in accordance with the Duropal Pyroex Splashback installation guide, Duropal Pyroex Splashbacks are compliant with the Building Code of Australia (BCA) and AS/NZS 5601.1:2013 Gas Installation Code.

Electric Cooktops

Duropal Pyroex Splashbacks can be installed directly onto plasterboard, cement block or sheet, brickwork, or any existing wall coverings such as wallpaper, textile coverings or ceramic tiles, using double sided tape and suitable construction adhesive or silicone.

Gas Cooktops

Duropal Pyroex Splashbacks can be installed directly onto brickwork or cement blocks using double sided tape and suitable construction adhesive or silicone.

For all other surfaces the minimum distance measured from the periphery of the nearest burner must be 200mm.

If either of the above cannot be achieved, please refer to the fitting guide for more detailed installation instructions for gas cooktops.

Caution

When using Gas Appliances, it is important to remember that the gas flame actually laps the side of any cooking vessel used. Therefore it is important to always ensure that any cooking vessel is at all times, well within the cooking appliance perimeters, as typically outlined in most appliance installation guides.

NB: This information is a guide only. It is important that when splashbacks are fitted around appliances that all appliances are installed in accordance of the requirements of the AS/NZS 5601.1.2013 and the manufacturers instructions. You should refer to your appliance manufacturers instructions for minimum distance requirements, etc.

Cleaning and Maintenance

Duropal Pyroex Splashbacks are undemanding in this respect and do not require special maintenance. Lightly soiled sheets may be cleaned with a soft damp cloth.

More heavily tarnished grime or stains can be removed with warm soapy water or with a proprietary cleaning agent which does not contain any abrasive material or strong alkaline (bleach).

Amorini NZ is a proudly owned and operated company sourcing superior quality materials from international specialist manufacturers. We combine 21st century designs, materials and systems with old-fashioned craftmanship.

www.amorini.co.nz info@amorini.co.nz